


SkyTrak Multi-Blind Installations

A multi-blind installation should be done using a shelf on which you should sit the blinds. The shelf can be any size you like. A 25mm x 25mm aluminium angle can be supplied, and can be specified at the point of order. We will also supply the required self-drilling screws to join the side rails together.

If ordering the aluminium angle from us, note that you will still need to supply the actual finished blind sizes to us, after having deducted for the thickness of the ally angle (2mm).



2 BLIND INSTALLATION

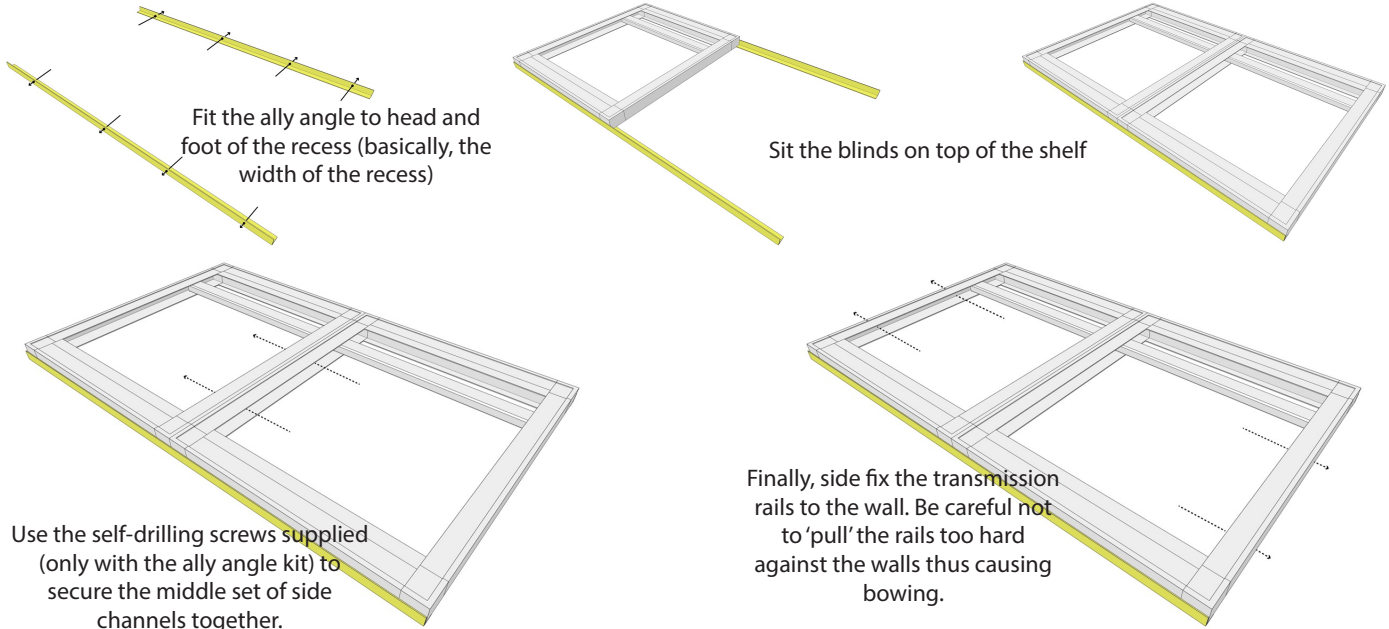

When using a shelf, you should make sure that you have enough space above the installation to be able to lift the blinds in and over the lip of the shelf. If not, checkout this tip.

3 BLIND INSTALLATION

For a 3 blind installation, you should follow exactly the same process as for the 2 blind installation, but, you will need to fit ally angle to the drop sides of the recess as well. This is to ensure that you are not relying on the side fixing through the transmission rails, but instead sitting everything on the shelf. In this situation, there is no need to secure the transmission rails to the sides of the recess

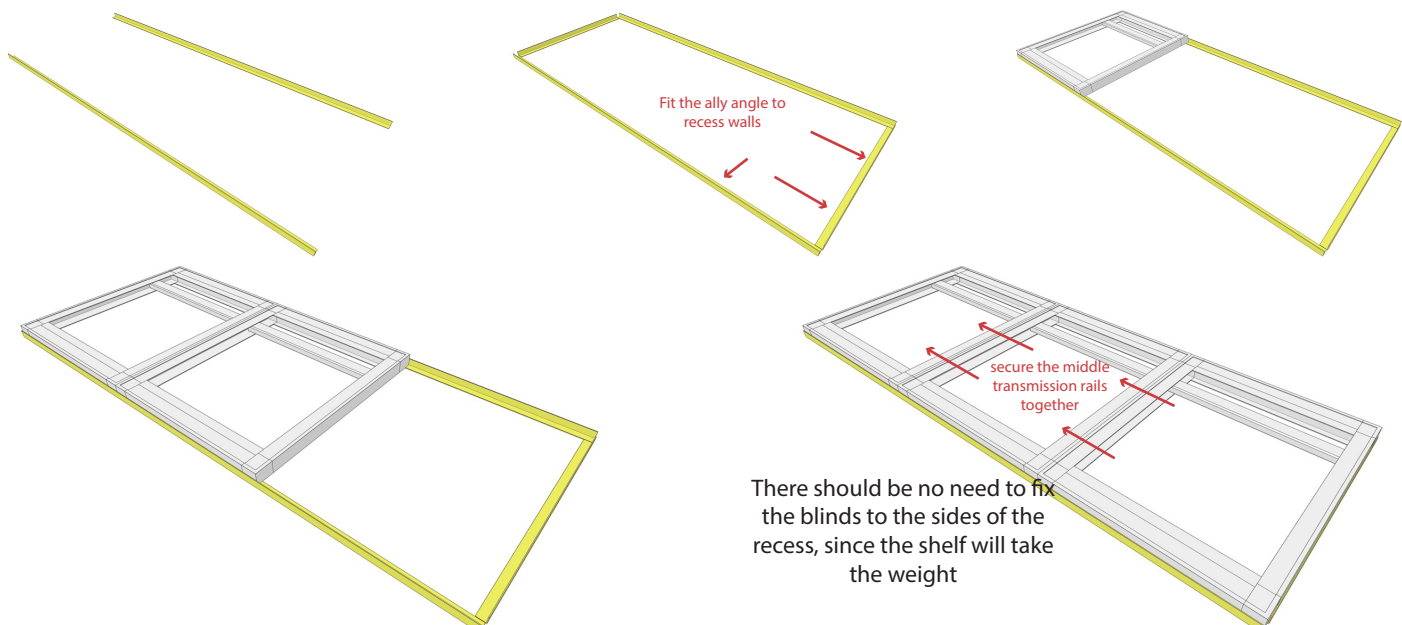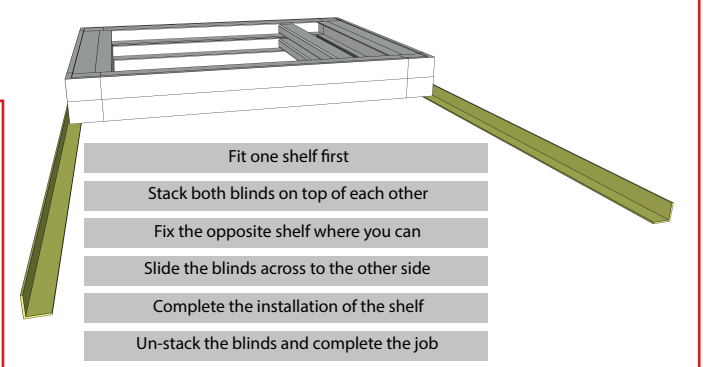

When ordering an aluminium angle kit, we will supply the ally angle to be 20mm longer than the finished blinds sizes that you supply. You will need to cut them on-site to make a good close fit.